## **Flin Energy**



FLINSLIM LITE SOLAR INVERTER

High Efficiency | Pure Sine Wave | In-built Solar Controller

- Pure sine wave hybrid inverter with 93% peak efficiency
- In-built PWM solar charge controller
- Double surge power capacity
- Advanced battery charging algorithm to increase battery performance
- Compatible to mains voltage and generator power
- Auto restart function and cold start functions
- Overload and short circuit protection
- Advanced monitoring software included



## **Comprehensive Display**

FlinSlim is designed to offer great flexibility in user operation. Inbuilt LCD screen and menu buttons allow you to customize voltage range, charging priority and battery charging current. You can also view operating status and power information on the LCD screen.




## Slim Design

Sleek design allows you to easily mount this inverter on the wall. With the included complete manual, installation is also super easy!





## Solar Enabled

FlinSlim makes going solar easy!
You can connect the solar panels
directly to the inverter and the inbuilt
solar charge controller will let you
generate free power from solar energy!
Intelligent system automatically gives
priority to solar power over grid power.





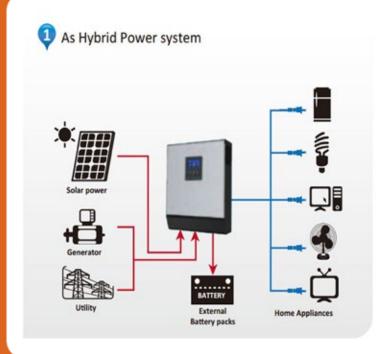

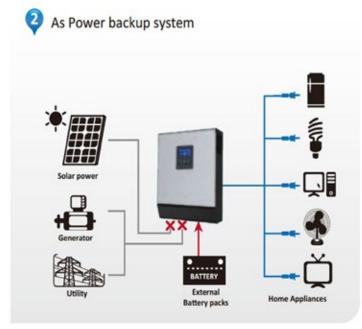

**Specifications of FlinSlim Lite Solar Hybrid Inverter** 

| MODEL                                    | 3 kVA-24V   | 5kVA-48V              |
|--|---|-----------------------|
| RATED POWER                              | 3000VA / 3000W  | 5000VA / 5000W        |
| INPUT                                    |   |                       |
| Voltage                                  | 230 VAC   |                       |
| Selectable Voltage Range                 | 170-280 VAC (For UPS Mode); 90-280 VAC (For Appliance Mode) |                       |
| Frequency Range                          | 50 Hz/60 Hz (Auto sensing)                                  |                       |
| ОИТРИТ                                   |   |                       |
| AC Voltage Regulation (Batt. Mode)       | 230 VAC ± 5%  |                       |
| Surge Capacity                           | 6000VA for 5 seconds  | 10000VA for 5 seconds |
| Overload Protection                      | 10 ms (For Personal Computers); 20 ms (For Home Appliances) |                       |
| Efficiency (Peak)                        | 93%   |                       |
| Transfer Time                            | 10 ms (For UPS Mode); 20 ms (For Appliance Mode)            |                       |
| Waveform                                 | Pure Sine Wave  |                       |
| BATTERY                                  |   |                       |
| Battery Voltage                          | 24 VDC  | 48 VDC                |
| Floating Charge Voltage                  | 27 VDC  | 54 VDC                |
| Overcharge Protection                    | 32 VDC  | 60 VDC                |
| SOLAR CHARGER                            |   |                       |
| Maximum PV Wattage Capacity              | 1500W   | 3000W                 |
| Operating Voltage Range                  | 30-32 VDC   | 60-72 VDC             |
| Maximum PV Array<br>Open Circuit Voltage | 80 VDC  | 105 VDC               |
| Maximum Solar Charge Current             | 50 A  |                       |
| Maximum AC charge current                | 25 A  | 60 A                  |
| PHYSICAL                                 |   |                       |
| Dimension, D x W x H (mm)                | 100 X 285 X 334   | 100 x 440 x 300       |
| Net Weight (kgs)                         | 6.3   | 11                    |
| OPERATING ENVIRONMENT                    |   |                       |
| Humidity                                 | 5% to 95% Relative Humidity(Non-condensing)                 |                       |
| Operating Temperature                    | -10°C - 55°C  |                       |
| Storage Temperature                      | -15°C - 60°C  |                       |

Product specifications are subject to change without further notice.